


RW-175



RW-175 is an extremely tough, semi-rigid, clear UL VW-I rated heat-shrink tubing exhibiting excellent high temperature performance. It has outstanding resistance to abrasion and cut through and is resistant to most chemicals and solvents. RW-175 is ideal as protection, insulation and strain relief in the most demanding of environments.

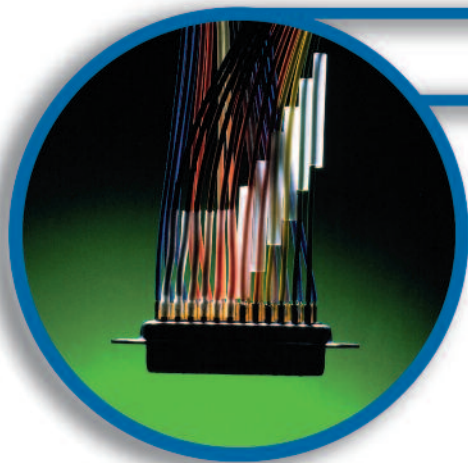

Technical Characteristics

| | |
|-----------------------------------|-----------------|
| Continuous operating temperature | -55°C to +175°C |
| Minimum full recovery temperature | +175°C |
| Shrink ratio | 2:1 |

Part Numbering Information

| Part No | D (mm) | d (mm) | W (mm) |
|--------------------|-----------|-----------|-----------|
| RW-175 - 3/64 - X | 1.2 | 0.6 | 0.25 |
| RW-175 - 1/16 - X | 1.6 | 0.8 | 0.25 |
| RW-175 - 3/32 - X | 2.4 | 1.2 | 0.27 |
| RW-175 - 1/8 - X | 3.2 | 1.6 | 0.27 |
| RW-175 - 3/16 - X | 4.8 | 2.4 | 0.27 |
| RW-175 - 1/4 - X | 6.4 | 3.2 | 0.33 |
| RW-175 - 3/8 - X | 9.5 | 4.8 | 0.33 |
| RW-175 - 1/2 - X | 12.7 | 6.4 | 0.33 |
| RW-175 - 3/4 - X | 19.1 | 9.5 | 0.43 |
| RW-175 - 1 - X | 25.4 | 12.7 | 0.48 |
| RW-175 - 1-1/2 - X | 38.1 | 19.1 | 0.51 |
| RW-175 - 2 - X | 50.8 | 25.4 | 0.51 |

Availability

Standard colours: Clear (X)

Specifications: Def Stan 59-97 Type 3
SAE AMS-DTL-23053/8
CSA LR31929 OFT 600V, 150°C
VG95343 Part 5 Type F
UL E35586 VW-I 600V, 150°C
VDE 0341/Pt9005
BS 3G-198 Part 4
NATO Codified

